


Cerberus/Doorway Sanitation System



Censor controlled sanitation system for Doorway traffic in the Food & Beverage industry

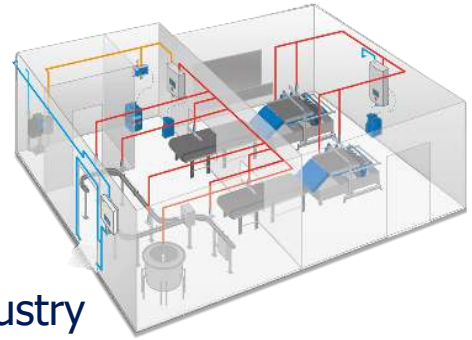

Nilfisk FOOD Cerberus/Doorway sanitation system is a hygienic stainless steel wall mounted sanitation unit, operating via a nozzle system in floor height.

The nozzle system sprays out a pre-mixed solution of water and detergent/disinfection across a doorway at a pre-set interval. The water and detergent is mixed into a high quality foam which clings to e.g. boots and machinery wheels crossing the doorway.

Due to a very easily operated programming module/timer, it is possible, on-site, and in short time, to pre-set the time and intervals of the foam disinfection to accommodate your facility's particular traffic patterns.

The programming module/timer secures an automatic, steady and reliable foam disinfection performance.

Applications

- Doorways

Features

- Timer function incl. day/night program
- Prepared for level switch in chemical can / chemical dry run
- Prepared for switch from door (open/close)
- Prepared for signal from photocell
- Regulation of air (foam quality)
- Pre-mixed solution of water and detergent/disinfection

Benefits

- High quality foam
- Stainless steel cabinet
- Easy to operate - easy selectable and adjustable programs
- Automatic and manual operation
- Nozzle system in floor height
- Easily operated programming module/timer
- Automatic, steady and reliable foam disinfection performance
- Reduces bacteria and virus from spreading between food facilities

Cerberus/Doorway System

Censor controlled sanitation system for Doorway traffic in the Food & Beverage industry



Technical specifications

Water	
Connection type inlet	1/2" quick coupler
Connection type outlet	1/2" quick coupler
Operational flow range	3-7 bar
Water consumption - foaming	3-5 l/min
Min. inlet pressure	3 bar@ 10 l/min
Max. inlet pressure	7 bar
Max. water temperature	70°C
Compressed air supply	
Connection type inlet	ø6 push in
Min. pressure of air supply	2 bar
Max. pressure of air supply	10 bar
Required flow rate	200 NI/min
Electricity	
Nom. current	10 A
Supply	230 V
Security of electrical wiring	10A
Electrical cable; L1, I2, L3, PE	3x1,5 mm ²
General	
Number of products	1
IP class	IP66
Sound level ISO 11202	Below 70dB
Weight	9 kg
Dimensions HxWxD	380x460x190 mm

Standard models

Model	Article no.
Cerberus/Doorway Sanitation System	110003453

Need more info?

Visit NILFISKFOOD.COM for more details including video tutorials and more.



Web



Video



Troubleshooting