



JETWAVE®

HIGH PRESSURE CLEANERS

Distributed by:

HORNET™ G2D 3000 psi • 15 l/pm



Diesel Driven



Cold Water




Daily Usage

FIELDS OF APPLICATION

- Ship Cleaning
- Mining Washdown
- Cleaning Contractors
- Boat Yards and Ports
- Agricultural Equipment
- Councils & Government

The Jetwave® Hornet G2D™ revolutionises the single cylinder gearbox diesel driven cold water high pressure cleaner powered by KOHLER™ Australian engineered and assembled; its innovation provides heavy duty users with a compact powerful, safe and easy to use unit that encompasses stainless steel exoskeleton (PEXO™) cover protection, centralised control & multi-configurable design.



SHOWN WITH OPTIONAL EXTRAS

HERO INNOVATIONS

- Stainless Steel Exoskeleton (PEXO™)**
Protective formed CNC cover to safeguard all components and for increased safety.
- Multi Configuration**
Industry first customisable modular build with precision heavy gauge steel chassis. Build it your way.
- Centralised Control**
Easily accessible one panel fascia mounted control(s) & components.
- AVPS™**
Anti-vibration protection system (AVPS™) for quieter & reliable performance.
- Versatile**
Multiple hose reel configurations.

STANDOUT FEATURES

- JW® Enhanced Italian triplex plunger pump** delivers performance and longer life.
- Low Speed professional pump** for increased reliability and longer maintenance intervals.
- KOHLER™ KD15-440 Engine.**
- Dual M22 screw hose coupling system.**
- Heavy duty washable inlet water filter.**
- Jetwave Safety System™ (JSS) thermal valve** to prevent overheating in excessive bypass and over pressurisation.
- Integrated accessory storage** for gun and lance.
- Professional line accessories.**
- Quality pressure gauge.**
- Zero line pressure brass adjustable unloader valve.**



Jetwave Group

10-16 Smith Street Thebarton I
Adelaide I South Australia I 5031 I AU
+61 8 8371 3599
sales@jetwave.com.au
jetwave.com.au

STANDARD EQUIPMENT



Spray Gun -
J5000™ heavy
duty insulated
back part lance
and quick
coupling.

Lance / Nozzle
- Stainless steel
dual lance with
variable pressure
control complete
with hardened
nozzles.

Hose - 15m of
3/8" double wire
braided hose with
quick coupling.

OPTIONAL ACCESSORIES

Accessory	p/n	Included
High Pressure Swivel	p/n	Included
Additional High Pressure Hose (per metre)	p/n	52001
Complete Turbo Head with Lance	p/n	JWA160
LS12 Foaming Lance with Tank	p/n	JWA221-LS12
JW Pro Foam Bypass System	p/n	PROFOAM
OEM Hose Reel (30m Capacity)	p/n	1060Cmpl
Pro Rapid Style Hose Reel (60m Capacity)	p/n	1067Cmpl
Pro Rapid Stainless Steel Hose Reel (60m Capacity)	p/n	1067CmplSS
Hammerhead™ FSC 21" ABS - Plastic	p/n	JWA-FSC21
Hammerhead™ FSC 21" Stainless Steel	p/n	JWA-FSC22
Giraffe™ Alloy Telescopic Lance	p/n	JWA-TELE7.3
Sandblasting Kit	p/n	JWA164
Sludge Kit	p/n	80005hv
Drain Cleaning Hose	p/n	HOP2X15VF
Professional Drain Cleaning Kit	p/n	JWA-PDCK
Vulcan V1 Hot Box	p/n	10199

MACHINE OPTIONS

Option	p/n	Included
Emergency Stop, Upgraded Lock-Out Battery Isolator (red), 4 Wheel Trolley Kit.	p/n	Included
Centre Lifting Point	p/n	On Application
Mine Specification Kit	p/n	On Application
Engine Hour Meter	p/n	JACD-TACHO
Forklift Pockets	p/n	90005LG2-FP
Stainless Steel Bypass Tank	p/n	90008-12G2
Low Level Water Cut Out	p/n	JWA220
5L Stainless Steel Chemical Holder	p/n	CHEM-5L

Compact - Modular frame design with top lift panels.


Protection - Designed for durability and a long life.

Control - Fascia mounted controls with plug n' go functionality.

Quality - Industry proven 'Italian' pump.

Power - KOHLER™ engine.

Flexibility - Multi configurable compact frame.

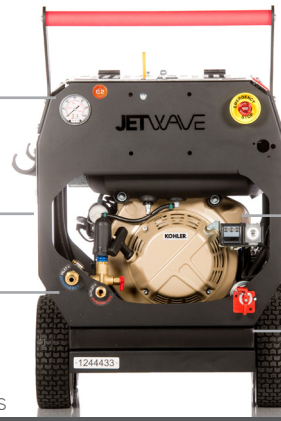

SHOWN WITH OPTIONAL EXTRAS

Product Code	p/n	CW3000-15DG2
--------------	-----	--------------

TECHNICAL DATA

Working Pressure	psi / bar	3000 / 210
Flow Rate	l/pm	15
Max Water Inlet Temp	°c / °f	60 / 140
Class (AS/NZS: 4233)	grade	A (3.150 BAR/LITRES)

INTENDED APPLICATION

Usage Frequency	hours / type	4 - 6 Daily / Daily
Category of Dirt / Debris	type	Medium

MOTOR FEATURES

Engine	type	KOHLER™ KD15-440
Power	hp / cc	10 / 441
Fuel Supply	type	Diesel
Fuel Capacity	litres	4.3
Low Oil Shutdown	y / n	Y
Hour Meter	y / n	N
Starting System	type	Electric Key Start

HYDRAULIC FEATURES

Pump / Head / Pistons	type	JW® Plunger Triplex / Brass / Ceramic
Motor Pump Coupling	type	Gearbox Drive
Pump Speed	rpm	1450
Unloader Valve	type	Independent (zero)
Safety Valve	y / n	Y
Orifice / Nozzle	size	045

OTHER FEATURES

Adjustable Pressure	y / n	Y
Hose Reel Provision	y / n	Y / 3 Positions
Frame Structure	type	Modular skid with heavy gauge steel covers
Onboard Accessory Storage	y / n	Y
Detergent Injector	y / n	Y - Downstream low pressure adjustable

DIMENSIONS & WEIGHT

Approx Weight	kg	110 unit / 120 boxed
Unit Dimensions	mm	1110(L) x 700(W) x 860(H)
Boxed Dimensions	mm	970(L) x 600(W) x 670(H)
Number per Pallet	type	Euro: 1

WARRANTY(S)

Engine Warranty*	year(s)	2	
Pump Warranty*	year(s)	3	

*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).

The manufacturer reserves the right to modify design features and technical facts without notice; due to our principals of continuous improvement.

V2.1 10/2020