

EXECUTIVE™ G2 280-21



4060
PSI

21
L/PM

HONDA GX630
PETROL
ENGINE TYPE
POWERED by HONDA.

GEARBOX
1450RPM
DRIVE

HOT
WATER
OUTPUT




HERO INNOVATIONS

- ETL™**
Engineered Top Lifting Lugs
- PEXO™**
Stainless Steel Exoskeleton
- JWPP™**
Jetwave Italian Premium Pump
- CC™**
Centralised Control
- AVPS™**
Anti Vibration Protection System

APPLICATIONS

- Tradesmen
- Commercial Cleaners
- Shipping & Logistics
- Hire & Rental

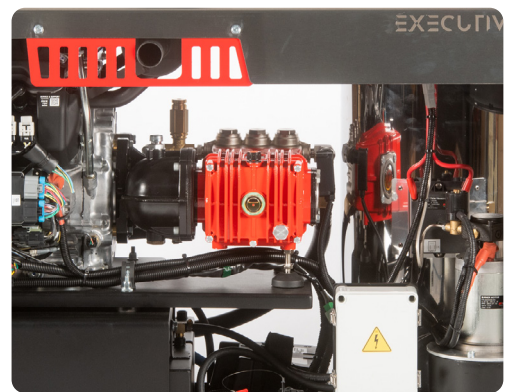

STANDOUT FEATURES

- JW® Enhanced Italian triplex plunger pump running at 1450RPM delivers more performance and longer life.
- Electric start Industrial V-Twin Honda™ GX630 Series Engine with digital engine hour meter.
- Jetwave Safety System™ (JSS) thermal and safety valve to prevent overheating in excessive bypass and over pressurisation.
- Vertical burner with GeniSys™ 12v Advanced Burner Control with smart sensors and protective features.
- Battery isolator & Emergency stop for increased safety and longevity.
- Seamless under chassis mounted dual fuel tanks protected from heat with front fill point safety.

STANDARD EQUIPMENT





J5000™ High Pressure Gun + Twin Lance with Nozzles.



15m Double Wire Braid Hose w/M22 Couplings.

DIMENSIONS (MM)



TECHNICAL DATA



EXECUTIVE G2 280

Product Code	HW4000-21PG2
Pressure / Flow Rate	4060 PSI (280 BAR) / 21 L/PM
Max Water Inlet / Outlet Temp	60°C / 90°C
Class (ASNZS: 4223)	A (5,500 Bar/Litres)
Usage Frequency	Professional: 4 Hours Daily
Nozzle Size	O5
Frame Structure	CNC Modular skid galvanised steel chassis plus satin powder coat finish and stainless steel cover

MOTOR FEATURES



Engine / Power	Honda™ GX630 Electric Key Start (air cooled) 20 HP / 630 CC
Fuel Type / Capacity / Protection	Unleaded / 17L / Low Oil Shutdown

HYDRAULIC FEATURES



Pump / Head / Pistons	JW® Italian Triplex Plunger / Brass (Nickle Plated) / Ceramic
Motor Pump Coupling / Pump RPM	Gearbox Drive / 1450RPM
Unloader Valve	Independent (Zero) - Adjustable
Safety Valve	Yes
Detergent Injector	Yes - Downstream low pressure (power boost)

THERMAL FEATURES



Burner Model	Vertical 12v V Series
Fuel Supply / Capacity / Consumption	Diesel / 17L / 5.74 L/PH
Coil / Housing Material	Mild steel 3mm wall seamless (400BAR rated) / Stainless Steel

DIMENSIONS & WEIGHT



Machine Dimensions / Weight	Skid: 1090mm(L) x 700mm(W) x 920mm(H) / 295KG (approx.)
-----------------------------	---

WARRANTY(S)



Unit / Pump Warranty*	2 Years
Engine Warranty*	3 Years

OPTIONAL ACCESSORIES

OPTIONAL UPGRADES

30m Hose Reel (Hose Reel Bracket Required)	1060CMPL	Honda iGX700 Engine Upgrade	ADD:FI
60m Hose Reel (Hose Reel Bracket Required)	1067CMPL	4 Wheel Trolley Kit	JWA407A
Hose Reel Bracket	9003OHMP-G2-R1	On-board Water Bypass Cooling Tank	90008-12ROTCMPL
Additional High Pressure Hose	52001	Low Level Water Cut Out	JWA220
JW Bypass Pro Foam	PROFOAM	Hose Reel Roller Guide HGS™	1067-GUIDEASSY (1067 Only)
Turbo Head w/Lance (300BAR)	JWA1160		
21" Hammerhead - ABS Plastic	JWA-FSC21		
21" Hammerhead - Stainless Steel	JWA-FSC21-5		

The manufacturer reserves the right to modify design features and technical facts without notice, due to our principals of continuous improvement.

*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).

V2.3 04/22