

CADET™ 200-15



3000
PSI

15
L/PM

ELECTRIC MOTOR
5.5KW 3 PHASE
MOTOR TYPE

DIRECT SOFT
COUPLING
1450RPM
DRIVE

COLD
WATER
OUTPUT



HERO INNOVATIONS



PEXO™
Galvanised Frame



JWPP™
Jetwave Italian Premium Pump



DTS™
Delayed Timer Stop



APPLICATIONS

Food & Beverage Cleaning

Transportation & Logistics

Agriculturist

Factory Cleaning

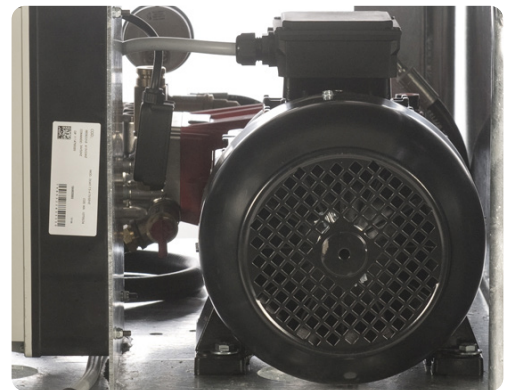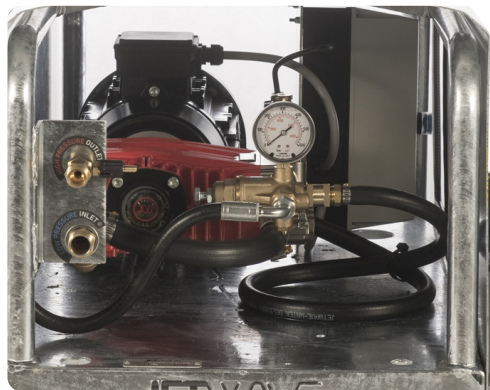

STANDOUT FEATURES

JW® Enhanced Italian triplex plunger pump running at 1450RPM delivers more performance and longer life.

Maintenance free low speed, electric motor, air cooled and protected with thermal cut-out.

Jetwave Safety System™ (JSS) thermal and safety valve to prevent overheating in excessive bypass and over pressurisation.

Zero line pressure brass adjustable unloader valve.

Quality assured voltage electrical control box for increased protection against dust and water ingress.

DTS™ Delayed Timer Stop electronic control for overall unit protection.


STANDARD EQUIPMENT



J5000™ High Pressure Gun + Twin Lance with Nozzles.



10m Double Wire Braid Hose with M22 Couplings.

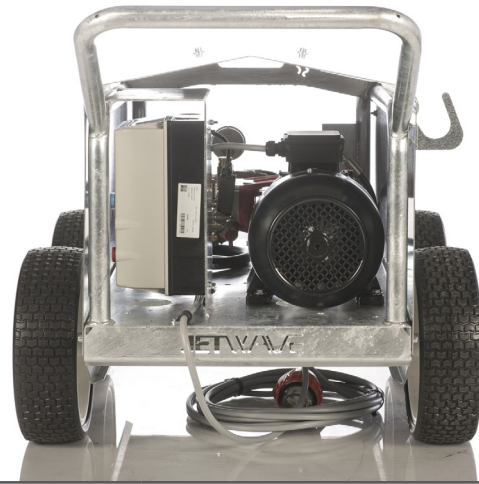

TECHNICAL DATA 0:00

CADET™ 200-15

| | |
|----------------------|--|
| Product Code | CW200-15ELCP24TS |
| Pressure / Flow Rate | 3000 (200 BAR) / 15 L/PM |
| Max Water Inlet Temp | 60°C |
| Class (ASNZS: 4223) | Class A (3,000 Bar/Litres) |
| Usage Frequency | Industrial: 6 - 8 Hours Daily |
| Nozzle Size | O45 |
| Frame Structure | Hot dipped galvanised with 4 wheel trolley kit |

MOTOR FEATURES

| | |
|------------------------|---|
| Motor / Power | Induction / 5.5kW / 3 Phase / 415v / 50Hz |
| Cable Length / Control | 8M / Delayed Timer Stop DTS™ |



HYDRAULIC FEATURES

| | |
|--------------------------------|---|
| Pump / Head / Pistons | JW® Italian Triplex Plunger / Brass / Ceramic |
| Motor Pump Coupling / Pump RPM | Soft Coupling Drive / 1450RPM |
| Unloader Valve | Independent (Zero) - Adjustable |
| Safety Valve | Yes |
| Detergent Injector | Yes - Downstream low pressure (power boost) |

DIMENSIONS & WEIGHT

| | |
|-----------------------------|---|
| Machine Dimensions / Weight | 1130mm(L) x 790mm(W) x 710mm(H) / 125KG |
|-----------------------------|---|

WARRANTY(S)

| | |
|-----------------------|---|
| Unit / Pump Warranty* |  2 Years |
| Motor Warranty* |  2 Years |

OPTIONAL ACCESSORIES

| | |
|----------------------------------|-------------|
| 30m Hose Reel | 1060CMPL |
| 60m Hose Reel | 1067CMPL |
| Additional High Pressure Hose | 52001 |
| JW12 Foaming Lance w/1L Tank | JWA221-LS12 |
| JW Bypass Pro Foam | PROFOAM |
| Turbo Head w/Lance (300BAR) | JWA160 |
| 21" Hammerhead - Plastic | JWA-FSC21 |
| 21" Hammerhead - Stainless Steel | JWA-FSC21-5 |

OPTIONAL UPGRADES

| | |
|-------------------------|------------------|
| Hour Meter | RQ48024VAC |
| Emergency Stop | JWA218 |
| On-Board Bypass Tank | 90008-12ROTOCMPL |
| Low Level Water Cut Out | JWA217 |
| High Temp Upgrade | ADD: HT |
| Forklift Pockets | 90051FP |

The manufacturer reserves the right to modify design features and technical facts without notice, due to our principals of continuous improvement.
*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).

V2.2 08/21